


800mm dia. Marker Buoys

AQUAFLOAT-800 Series

Sealite have a range of mooring chains & accessories - ask your representative today how we can supply your complete mooring solution

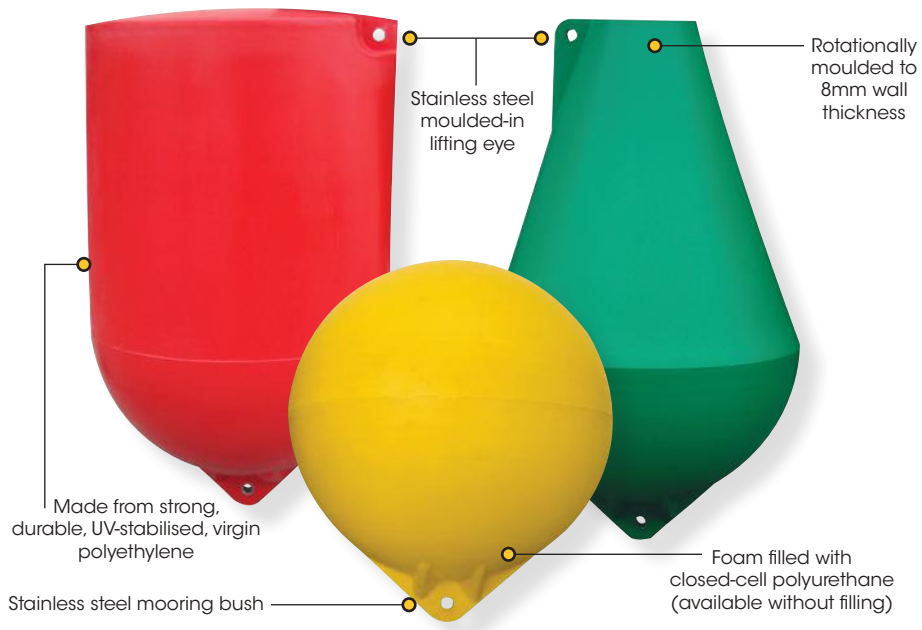

The Sealite Advantage

- High visibility red, green, white or yellow as per IALA recommendations
- Range of mooring equipment & chain available
- Available in three configurations to suit every installation
- Excellent buoyancy & stability
- Mould-in graphics to suit customer requirements

The Sealite AQUAFLOAT-800 is a rotationally-moulded marker buoy series designed as a single piece, low-cost aid to marine navigation. With a large 800mm diameter, these buoys provide clear visibility and can be fitted with a range of marine lanterns.

The AQUAFLOAT-800 series of buoys are available in various configurations to suit IALA requirements, and are rotationally-moulded in high-visibility, UV-stabilised polyethylene.

Moulded inserts on the top section of the float allow for convenient lantern attachment, while the buoys are foam filled with closed-cell polyurethane to prevent water ingress in the unlikely event of damage.

Moulded-in stainless steel lifting eyes in the SL-AQF800-CAN and SL-AQF800-CONE buoys enable ease of maintenance and servicing.




Optional Mould-in Graphics Available



800mm dia. Marker Buoys

AQUAFLOAT-800 Series

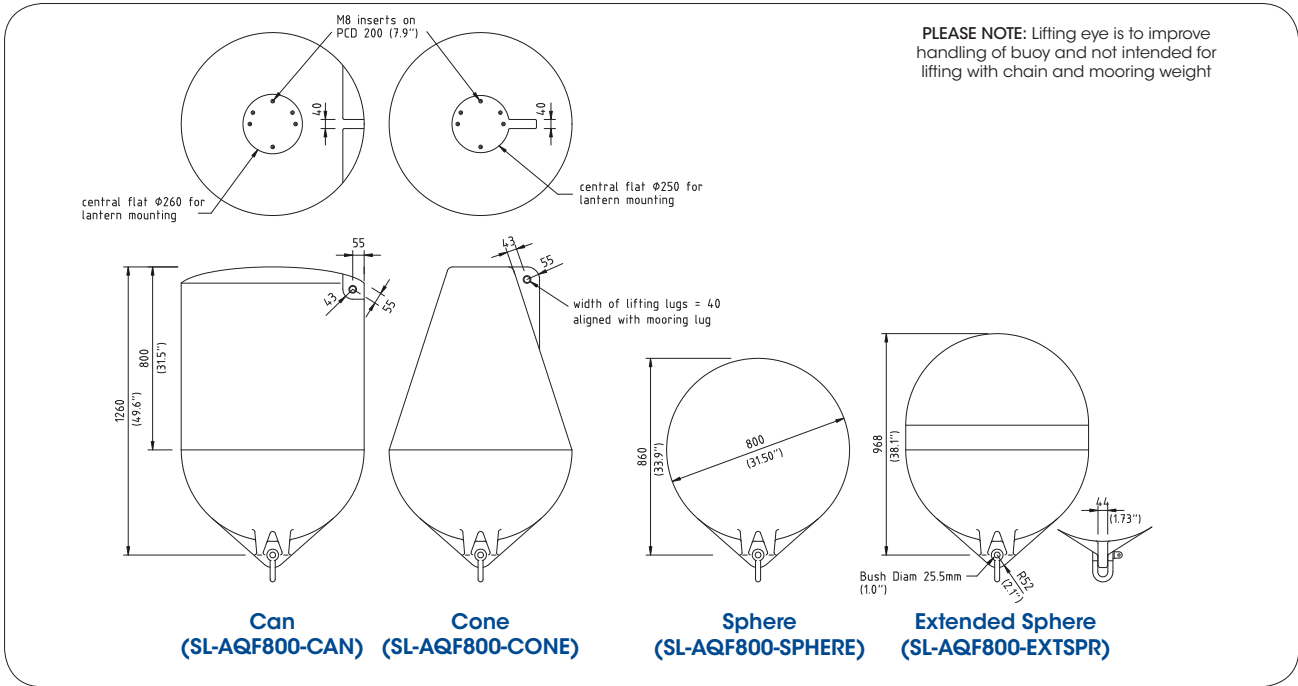

Moulded-in stainless steel lifting eyes in the SL-AQF800-CAN and SL-AQF800-CONE buoys enable ease of maintenance and servicing

Environmentally Friendly & Recyclable

Sealite buoy products are made from recyclable materials. As a service to customers, individual components and products at the end of their service life may be returned to Sealite for recycling.

SPECIFICATIONS * *		AQUAFLOAT-800 Series
General Characteristics		
Available Colours	Red, Green, White, Yellow as per IALA Recommendations	
Total Float Volume (ttrs/US gallon)	800 / 31 1/2 (SL-AQF800-CAN & SL-AQF800-CONE) 400 / 15 3/4 (SL-AQF800-SPHERE & SL-AQF800-EXTSPR)	
Reserve Buoyancy (kgs/lbs)	108 / 238 (SL-AQF800-CAN, SL-AQF800-CONE & SL-AQF800-SPHERE) 164 / 362 (SL-AQF800-EXTSPR)	
Maximum Mooring Load (kgs/lbs)	108 / 238 (SL-AQF800-CAN, SL-AQF800-CONE & SL-AQF800-SPHERE) 164 / 362 (SL-AQF800-EXTSPR)	
Draft, Maximum (mm/inches)	510 / 20 (SL-AQF800-CAN, SL-AQF800-CONE & SL-AQF800-SPHERE) 620 / 24 3/8 (SL-AQF800-EXTSPR)	
Freeboard, Minimum (mm/inches)	800 / 31 1/2 (SL-AQF800-CAN & SL-AQF800-CONE) 400 / 15 3/4 (SL-AQF800-SPHERE & SL-AQF800-EXTSPR)	
Physical Characteristics		
Material	Rotationally-moulded UV-stabilised virgin polyethylene	
Wall Thickness (mm/inches)	8 / 1/3	
Ballast (kg/lbs)	20 / 44	
Filling	Closed-cell polyurethane foam	
Height (mm/inches)	From 860 / 33 7/8	
Width (mm/inches)	800 / 31 1/2	
Mass (kg/lbs)	58 / 128 (SL-AQF800-CAN), 48 / 106 (SL-AQF800-CONE), 45 / 99 (SL-AQF800-SPHERE), 46 / 101 (SL-AQF800-EXTSPR)	
Product Life Expectancy	Up to 12 years	
Certifications		
IALA	Surface colours compliant to IALA E-108	
Quality Assurance	ISO9001:2008	
Intellectual Property		
Trademarks	SEALITE® is a registered trademark of Sealite Pty Ltd	
Warranty *	1 year	
Lantern Options	Sealite SL-15, SL-60 or SL-70 lantern	
Options Available	<ul style="list-style-type: none"> No foam filling Mould-in graphics 	

CE • Specifications subject to change or variation without notice
 * Subject to standard terms and conditions